

RGB-контроллер C308 (12/24V, 180/360W, RF-ДУ 4 кн)



Product Speciality

- Under the control of wireless, the effective remote control distance is 50 meters.
- 3 channel RGB control: the max current of each channel up to 5A.
- Multi-Mode to select.
- Stay at chosen color.
- 8 scale speed.


Application Sites

- Building Decoration: Business spaces, airports, subway.
- Indoor Decoration: Lighting and back lighting for hospital, hotel, marketplace, square, dining-room, pub and etc..
- AD solid Word, sign and mark, signboard and billboard.
- Be used as big area back lighting source.

Product Attributes


DC input voltage	12/24V
Output power	5A(Max) per channel, 12V: 180W; 24V: 360W
Size	211(L)X40(W)X30(H) mm
Remote distance	50 meters
Weight	310g

Dimension

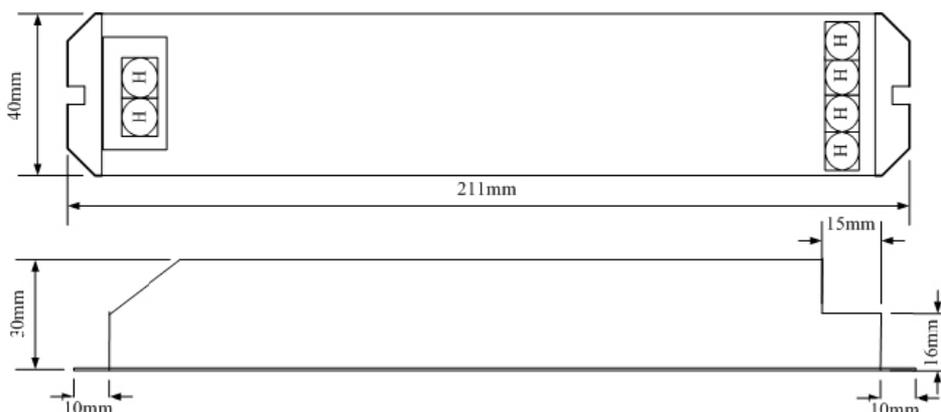

Change Mode Instruction

Mode Name	Mode Description
M1	Seven Color Flash
M2	Leaning Color Fade
M3	Full Color Fade
M4	Loop
M5-11	Seven Fixation Color

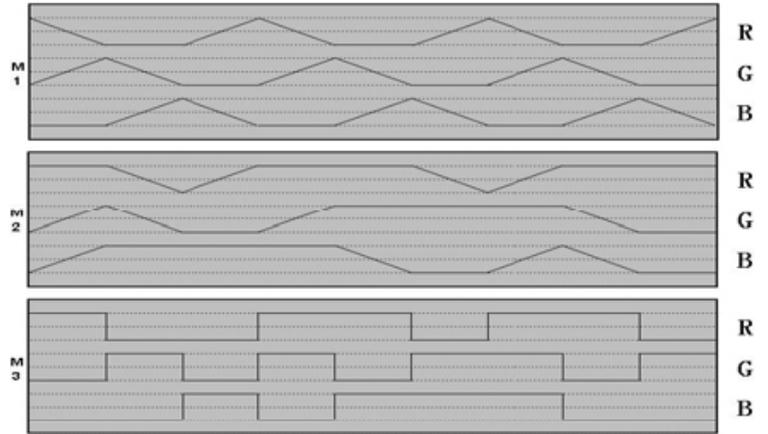

Operation Instruction

The Functions of the buttons:

A Mode; B Pause; C Speed up; D Speed down

- A:** Press it to change the mode to the next one;
- B:** Press it to make the LED stays at the present color, press it again then the color change moves on;
- C:** Press it to make the change speed of the LED to a faster level Default is fastest level
- D:** Press it to make the change speed of the LED to a slower level.

